




# Lockout/Tagout Products

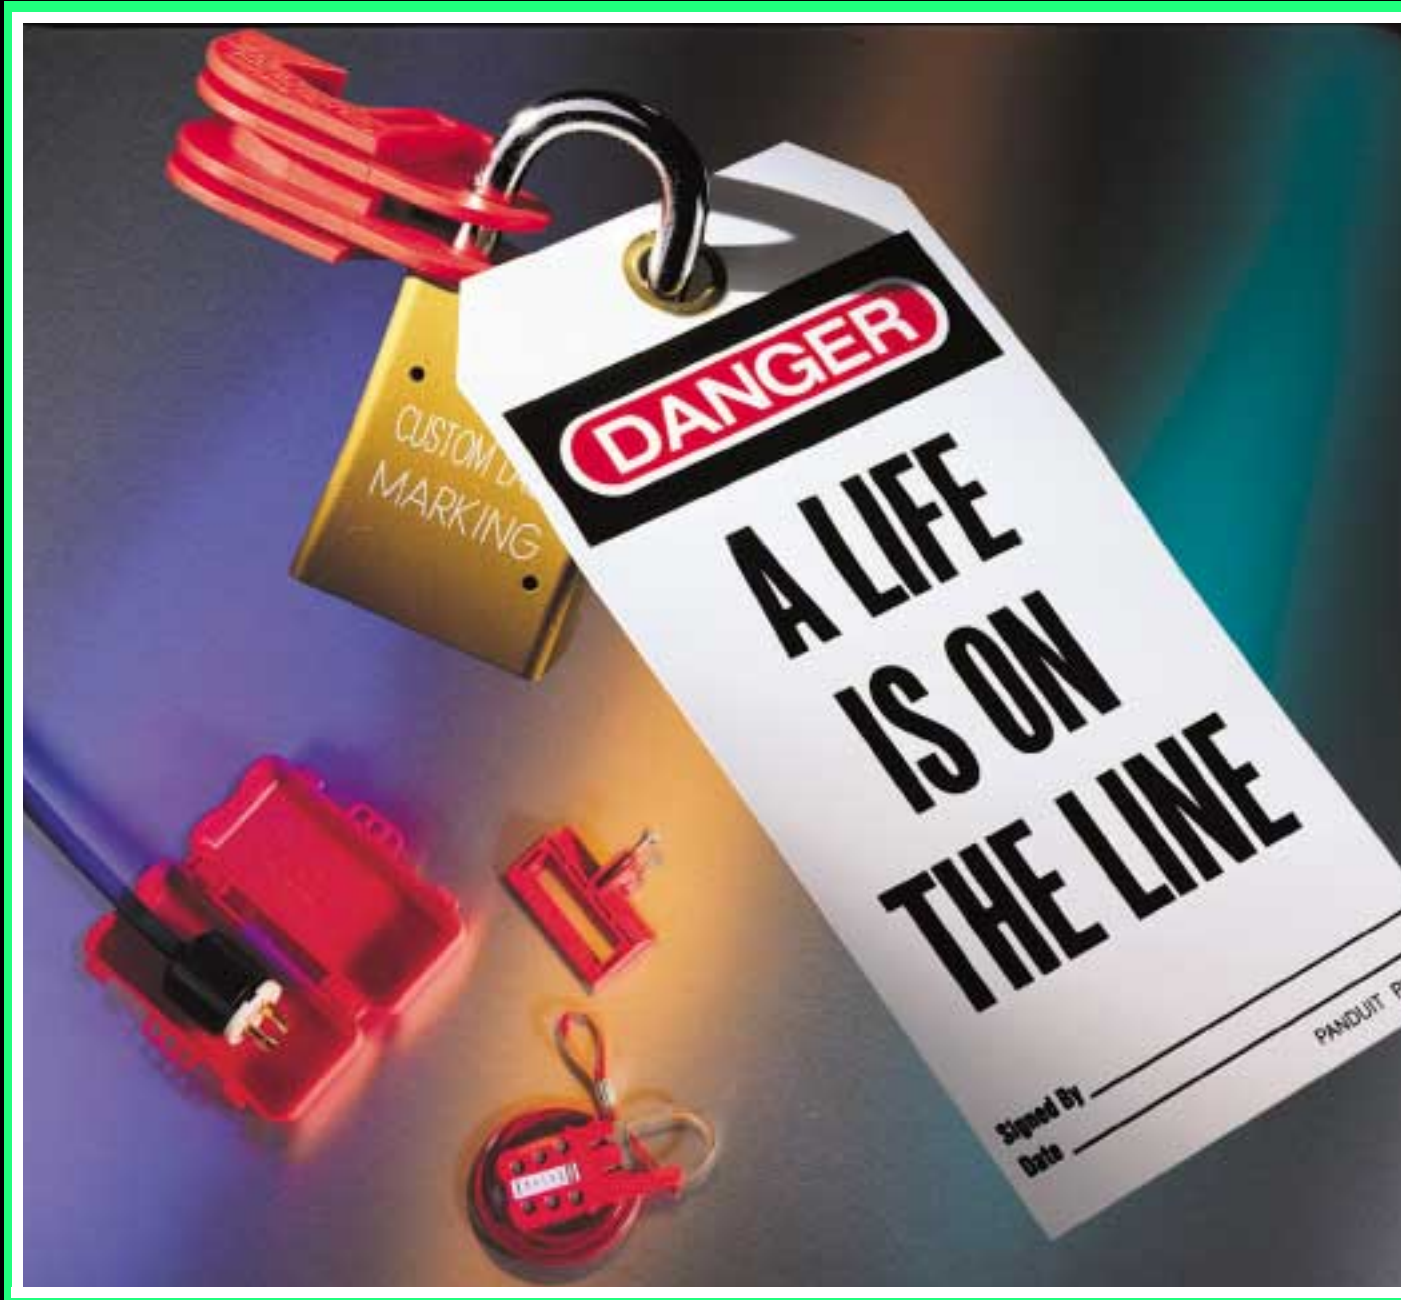

Products designed to help meet  
the requirements of OSHA  
Standard 1910.147

Sold exclusively through your local Panduit Distributor

## INDEX

<b>Training .....</b>	<b>3 - 4</b>
OSHA Compliance Manual .....	3
Training Video and Handbooks .....	3
CD-ROM Interactive Lockout/Tagout Training Program .....	4
Lockout Steps Wallet Card .....	4
<b>Lockout Devices .....</b>	<b>5 - 12</b>
Circuit Breaker Lockouts .....	5 - 6
Multiple Lockout Device .....	7
Plug and Cord Lockouts .....	7 - 8
Receptacle Blockout .....	8
Wall Switch Lockouts .....	9
Valve Lockouts .....	10
Lockout Kits and Stations .....	11 - 12
<b>Padlocks, Hasps and Accessories .....</b>	<b>13 - 16</b>
Padlocks .....	13 - 14
Lockout Hasps .....	15
Padlock Accessories .....	15 - 16
<b>Tags, Signs and Labels .....</b>	<b>16 - 29</b>
Safety Tags .....	16 - 20
Marker Pens .....	21
Safety Signs .....	22 - 24
<b>SAFETY EASE™</b> Safety Sign Software and Accessories .....	25 - 26
Lockout/Tagout Labels .....	27
ISO Labels .....	28
Voltage Markers .....	29
<b>Generic Lock Order Form .....</b>	<b>30</b>



## Lockout/Tagout Requirements

The Occupational Safety and Health Administration (OSHA) has mandated that all energy sources be turned off and locked out to protect employees from injuries caused by the accidental startup of equipment under repair or service. This is outlined in OSHA standard 29CFR 1910.147.

Panduit has developed a complete program to help you comply with these standards:

- Full line of lockout devices, tags, signs for a variety of energy sources
- Compliance manuals to help you understand the regulations and implement a compliance program
- Training videos, interactive CD-ROM programs and handbooks for your employees



## OSHA Compliance Manual

The Lockout Compliance Manual takes you step-by-step through the process of bringing your company into compliance with OSHA Standard 29CFR 1910.147.

Topics covered:

- Background, scope and purpose of the regulation
- Process of developing a lockout/tagout plan
- How to write your company's lockout/tagout policy
- Establishing lockout/tagout procedures for equipment in your plant
- Implementing a lockout/tagout training program

Also included:

- Forms to administer your program
- Sample programs and procedures

Part Number	Description	Std. Pkg.*
PSL-LCM	OSHA Compliance Manual	1



## Lockout Regulations Training Video and Handbooks



### "A Life Is on the Line" Lockout/Tagout Training Program (English or Spanish)

This training program is designed to protect your employees and helps put you into compliance with OSHA Lockout/Tagout general training requirements quickly, easily and at low cost.

This complete package includes:

- Lockout/Tagout Regulations Video
- 10 Participant Guides with Quizzes
- 10 Certificate of Completion Cards
- Leaders Guide complete with Quiz Key
- Training Log
- Lockout/Tagout samples
- Panduit Lockout/Tagout Bulletin

Part Number	Description	No. Guides and Cards Included	Std. Pkg.*
PSL-LTP	Complete English Program - VHS Format Video	10	1
PSL-LTPA	Complete English Program - PAL Format Video	10	1
PSL-LTM	Replacement English Participant Guides and Completion Cards	10	1
PSL-LTPS	Complete Spanish Program - VHS Format Video	10	1
PSL-LTMS	Replacement Spanish Participant Guides and English Completion Cards	10	1



## Group Lockout Video



"Your Lock is Your Key to Life" Training Program provides thorough instruction on OSHA recommended safety practices and procedures for group lockout — multi-craft / multi-shift lockout operations.

This complete package includes:

- Group Lockout / Tagout Video
- Leader's Guide with Quiz Key
- Training Log
- 25 Lockout Steps Wallet Cards
- 10 Participant Guides with Quizzes
- 10 Certificate of Completion Cards
- Lockout/Tagout samples
- Panduit Lockout/Tagout Bulletin

Part Number	Description	No. Guides and Cards Included	Std. Pkg.*
PSL-LTPGP	Complete English Program - VHS Format Video	10	1
PSL-LTMGP	Replacement English Participant Guides and Completion Cards	10	1



## CD-ROM Interactive Lockout/Tagout Training Program



Increase employee retention of critical lockout/tagout requirements and related safe work practices with the "A Life Is On The Line" interactive CD-ROM Training Course. The Panduit "A Life Is On The Line" video is featured along with audio, text and graphics to provide a time and cost effective method of lockout/tagout training.

At their own pace, employees will learn:

- General Lockout/Tagout Requirements
- Proper Shutdown and Startup Procedures
- Lockout and Tagout Device Requirements and Applications
- Proper Installation of Common Lockout Devices

- Correct test answers and rationale are featured immediately after an incorrect response
- Post test evaluation identifies subject areas associated with incorrect responses to allow trainer to focus on individual follow up training
- Create Certificates of Completion and maintain training and test records for OSHA compliance
- Approximate course completion time: 30 to 60 minutes
- English only

### This self-instructive program includes:

- CD-ROM interactive training program
- 25 PSL-STEPS Lockout Steps Wallet Cards
- 10 Quick Reference Lockout Steps / Certificate of Completion Cards
- Quick Start Trainer and Trainee Guide
- Panduit Lockout/Tagout Products Bulletin
- Lockout/Tagout Samples

### Minimum System requirements:

- 486 processor
- WINDOWS 95, 98, or NT 4.0 or higher
- 4 Mb RAM
- 10 Mb free hard disk space
- 2X speed CD-ROM drive (4X speed recommended)
- WINDOWS compatible sound card compatible mouse
- 640 x 480 monitor (800 x 600 recommended)
- 256 color VGA display (SVGA recommended)

Part Number	Description	Std. Pkg.*
PSL-LTPCD	CD-ROM Interactive Lockout/Tagout Training Program	1

DANGER

A LIFE IS ON THE LINE!

OSHA LOCKOUT STEPS

SHUTDOWN

Inform operator and supervisor about work to be done

- 1) Prepare for shutdown
- 2) Shutdown/turn off equipment
- 3) Isolate from energy source
- 4) Apply lockout/tagout to energy isolating device
- 5) Release all potentially hazardous stored or residual energy
- 6) Verify the isolation

STARTUP

- 1) Assure equipment operationally intact, clear all personnel & tools
- 2) Notify all affected employees about startup and lockout/tagout device removal
- 3) Assure lockout/tagout is removed from each energy-isolating device  
(See section 6(e) and 6(f) of 29 CFR 1910.147 for specific requirements of the standard)

## Lockout Steps / Calendar Wallet Card



- Provide those employees responsible for lockout/tagout procedures with a constant reminder of the OSHA recommended steps for shutdown and startup
- Semi-rigid card fits easily in wallet
- Current year calendar is printed on back side

Part Number	Description	Size In. (mm)	Std. Pkg.*
PSL-STEPS	Lockout Steps / Calendar Wallet Card	2.13 x 3.38 (54 x 86)	1 Pkg. (25 cards)

\* Order number of packages required in multiples of Std. Pkg.



## Universal Circuit Breaker Lockout



Individual circuit breakers can be locked in off position without locking out the entire panel

- New shroud over set screw prevents tampering of the device during lockout procedures
- Accommodates breaker handles with 0.30" - 0.60" (8 x 15 mm) high and 0.25" - 0.44" (6 x 11 mm) thick switches
- Compact, universal design fits wide range of single, double and triple handle circuit breakers
- Easily attached with no modifications to panel or circuit breaker
- Does not require hole in circuit breaker handle



Part Number	Description	Std. Pkg.*
PSL-CB	Universal Circuit Breaker Lockout	1

## Square D I-LINE<sup>▲</sup> / Federal Pacific (FPE) Circuit Breaker Lockout Device



Individual circuit breakers can be locked in off position without locking out the entire panel

- Accommodates a wide range of Square D I-LINE<sup>▲</sup> and equivalent circuit breaker brands and styles as well as Federal Pacific (FPE) breakers
- Compact, lightweight
- Easily attached with no modifications to panel or circuit breaker
- Rugged nylon construction offers great strength and durability
- Shroud over set screw prevents tampering of the device during lockout procedures



Part Number	Description	Std. Pkg.*
PSL-CBIL	Square D I-LINE / Federal Pacific (FPE) Circuit Breaker Lockout Device	1

## Installation instructions for PSL-CB and PSL-CBIL



Turn switch to off position. Place lockout over desired switch.



Tighten set screw securely with standard screwdriver.



Attach padlock and tag.



Verify that the lockout device secures the disconnect in a safe or off position.

To lockout mini circuit breakers, see PSL-WS on [page 9](#).

## Molded Case / Enclosed Systems Circuit Breaker Lockout



- Accommodates breaker handle dimensions up to 0.80" thick x 3.00" wide (20 x 76 mm)
- Secures and prevents re-engaging of the breaker handle
- Easy installation — no installation tools required
- Accepts Panduit PSL-3, PSL-4, PSL-5 and PSL-1 1 Lock Series (see **pages 13 - 14**)
- Rugged stainless steel/nylon construction offers great strength, durability, added security and corrosion resistance

Designed to lockout a wide range of 3 phase circuit breakers (277V and above)

Part Number	Description	Std. Pkg.*
PSL-CBL	Molded Case / Enclosed Systems Circuit Breaker Lockout	1



Verify circuit breaker is de-energized. Place lockout device over breaker with the handle centered in lockout opening.



Turn the toggle set screw knob and tighten firmly against breaker handle.



Rotate and flip toggle set screw upwards.



Install lock and tag and test for security. Verify that the lockout device secures the disconnect in a safe or off position.

## "Life Savers" Circuit Breaker Lockout Kit



Contains:

PSL-CB  
PSL-CBIL  
PSL-CBL



- Contains three circuit breaker lockout devices that will secure and prevent the re-engaging of the vast variety of commercial, institutional and industrial circuit breakers:
  - Single, double, triple pole
  - Square D **I-LINE**▲ and equivalent circuit breaker brands and styles
  - Molded case/enclosed systems
  - Federal Pacific (FPE)
- Quick and easy to install
- Rugged nylon construction offers great strength and durability



Part Number	Description	Std. Pkg.*
PSL-CBKIT	"Life Savers" Circuit Breaker Lockout Kit	1 kit

## Lockout Warning Strip Labels



- Write-on area for adding your own warning message
- Label removes easily after repairs are completed
- Features the international prohibition symbol for "Do Not Throw Switch"

Part Number	Material	Marker Size In. (mm)	Markers Per Book	Std. Pkg.*
PSL-CBWL	GMC1 Vinyl Cloth	4.84 x 0.54 (123 x 14)	60	1

Designed as a warning device to prohibit tampering with push buttons during lockout operations.

NOTE: This is not a lockout device.

## Multiple Lockout Device



Only one device needed to perform a variety of lockout functions:

- Rugged stainless steel/nylon construction offers great durability, strength, added security and corrosion resistance
- Compact and easy to install
- One six foot vinyl coated galvanized steel cable with loop hole **free** with every lockout!

Part Number	Description	Std. Pkg.*
PSL-MLD	Multiple Lockout Device; includes lockout hasp and cable	1
PSL-MLDC	6 ft. (1.8 m) vinyl coated galvanized steel cable with loop hole, 0.19" (4.8 mm) diameter. Combine several cables to extend cable length.	1
PSL-MLDC200	200 ft. (61.0 m) vinyl coated galvanized steel cable on roll, no loop hole, 0.19" (4.8 mm) diameter	1
PSL-MLDH-X	PSL-MLD Lockout Hasps without cable	10

Lockout Single or Multiple Disconnects



Gate Valve Lockout Device



Immobilize Large or Cumbersome Devices



## North American 120 Volt / Industrial Plug Lockout



- Lockout device for a wide range of 120 Volt AC and industrial plug connector applications (see [page 8](#) for other plug types)
- Requires a hole in a blade of the plug
- Should be used with locks that have a minimum shackle length of 1.5" (38 mm)

Part Number	Description	Std. Pkg.*
PSL-P	Plug Lockout	1

Prevents a plug from being plugged in



Place PSL-P Lockout through the hole in blade of plug.



Insert padlock shackle through both holes in the lockout and lock padlock.



Verify that lockout cannot be removed from plug and that plug blades cannot be inserted into a receptacle. Add safety tag.

## Global Plug Lockout



Prevents a plug from being plugged in

- Compact, universal design accommodates most 220-240 volt plugs (see **page 7** for 120 Volt Plug Lockout)
- Quickly and easily installed
- Nylon construction offers great strength and durability
- Accepts Panduit PSL-3, PSL-4, PSL-5 and PSL-11 series locks (see **pages 13 - 14**)
- Requires lock with shackle diameter between 0.20" (6 mm) and 0.37" (9 mm)
- Note: cannot be used with North American 120 VAC plugs

Part Number	Description	Std. Pkg.*
PSL-PI	Global Plug Lockout	1

## Cord Lockouts



Prevents a plug from being plugged in

- Two sizes to accommodate small and large plugs
- Locks must have 0.38" (10 mm) or smaller shackle diameter

Part Number	Description	Inside Dimension In. (mm)	Std. Pkg.*
PSL-CL110	Lockout for 120 Volt AC Cord	2.00 x 2.00 x 3.50 (51 x 51 x 89)	1
PSL-CL480	Lockout for 240-480 Volt AC Cord	3.25 x 3.25 x 6.5 (83 x 83 x 165)	1

## Receptacle Blockout



Used to prevent use of an open electrical receptacle

- Prevent overloading the circuit, which may cause damage to equipment plugged into the other receptacle
- Prevent use of the open receptacle for devices which may induce electrical interference in computer equipment, causing data transmission problems or damage of computer controlled equipment

Part Number	Description	Std. Pkg.*
PSL-ERB	Blockout for open electrical receptacles	1



Place PSL-ERB blockout device over outlet so that the hole pattern in the blockout lines up with the 3 holes in the receptacle to be used.



Insert plug into the receptacle. The blockout is now held firmly in place by the plug and the second receptacle is blocked out.



## Toggle Switch Lockout



- Compact, secure design fits most toggle switches and some small circuit breakers
- Accommodates switches 0.45" - 0.78" (12.2 - 19.8 mm) high x 0.25" - 0.38" (6.4 - 9.6 mm) wide x 0.25" - 0.40" (6.4 - 10.2 mm) thick
- Easily attached without removal of face plate or screws
- Quick installation with standard screwdriver

Part Number	Description	Std. Pkg.*
PSL-WS	Toggle Switch Lockout	1

For locking out electrical supply controlled by ordinary toggle switches

Lock out toggle switches without removing faceplates screws



Turn switch to desired position. Place lockout over switch.



Tighten set screw securely with a standard screwdriver.



Attach padlock and tag. Test to insure secure lockout.

Lock out mini circuit breakers



## Toggle / Rocker Switch Lockout



- Versatile design allows lockout of both toggle and rocker switches
- Install device using faceplate screws

Part Number	Description	Std. Pkg.*
PSL-WS1A	Wall Switch Lockout for standard toggle or rocker switches	1

For locking out electrical supply controlled by toggle or rocker switches

## Gate Valve Lockouts



Prevents valve handle from being turned. Slip lockout over valve handle and attach padlock.

- Four colors in five sizes to fit valve handles up to 13" (330 mm)
- Fast and easy to apply
- Locks must have a 0.3" (8 mm) or smaller shackle diameter with a 1.0" (25 mm) minimum shackle clearance

Part Number				Valve Handle Size In. (mm)	Std. Pkg.*
RED	BLUE	GREEN	YELLOW		
PSL-V2	PSL-V2BLU	PSL-V2GRN	PSL-V2YEL	1.0 - 2.5 (25 to 64)	1
PSL-V4	PSL-V4BLU	PSL-V4GRN	PSL-V4YEL	2.5 - 5.0 (64 - 127)	1
PSL-V6	PSL-V6BLU	PSL-V6GRN	PSL-V6YEL	5.0 - 6.5 (127 - 165)	1
PSL-V9	—	—	PSL-V9YEL	6.5 - 10.0 (165 - 254)	1
PSL-V13	—	—	PSL-V13YEL	10.0 - 13.0 (254 - 330)	1



PSL-V2BLU

PSL-V4YEL

PSL-V6GRN

PSL-V9


## Ball Valve Lockouts



Prevents valve handle from being turned

- Two sizes for ball valves up to 3" (76 mm)
- PSL-BV1 (only) may be attached with valve in open or closed position
- Locks must have a 0.3" (8 mm) or smaller shackle diameter with a 1.0" (25 mm) minimum shackle clearance

Part Number	Valve Size In. (mm)	Std. Pkg.*
PSL-BV1	0.25 to 1.00 (13 to 25)	1
PSL-BV2	1.25 to 3.00 (32 to 76)	1

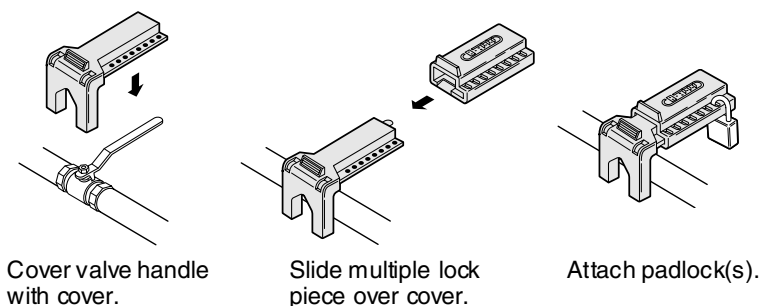

Cover valve handle with cover.

Slide multiple lock piece over cover.

Attach padlock(s).

## Electrician's Lockout Kit



Part Number	Contents	Std. Pkg.*
PSL-PK-EA	(1) Screwdriver (1) Lockout Regulations Booklet (1) PSL-PK Pouch (1) PSL-5RED-LS Long Shackle Padlock w/Red Label (1) PSL-MLD Multiple Lockout Device (1) PSL-WS Wall Switch Lockout (1) PSL-CB Circuit Breaker Lockout (1) PSL-P Plug Lockout (5 Tags) PVT-30 Electricians Blocking Tags	1

For the individual electrician to lockout a variety of electrical sources

## Power and Panel Distribution Lockout Kit



Part Number	Contents	Std. Pkg.*
PSL-KT-PWR	(1) Screwdriver (1) Lockout Regulations Booklet (1) PSL-STATION Metal Wall Mount Cabinet (2) PSL-5RED-LS Long Shackle Padlocks w/Red Labels (1) PSL-MLD Multiple Lockout Device (2) PSL-CB Circuit Breaker Lockouts (2) PSL-CBL Molded Case / Enclosed Systems Circuit Breaker Lockouts (1) PSL-P Plug Lockout (25 Tags) PVT-23-Q "DO NOT OPERATE ELECTRICIANS AT WORK" Tags	1

For locking out circuit breakers and disconnect switches in a variety of pole sizes, amperages and voltages.

### Metal Wall Mount Cabinet

Part Number	Description	Dimensions In. (mm)	Std. Pkg.*
PSL-STATION	Can be purchased separately and filled with your own variety of lockout devices and tags (Non-lockable)	14.75 x 10.25 x 4.63 (375 x 260 x 117) with two 0.38 (9) mounting holes	1

Mount close to power and distribution panels



Station is equipped with a stop hinge door so lockout devices won't fall out



Durable steel case is also portable



## Contractor Lockout Kit



For the Electrical Contractor to identify personnel working on a project required to be locked out and provide lockout capability for many projects

Part Number	Contents	Std. Pkg.*
PSL-KT-CONA	(1) Screwdriver (1) Lockout Regulations Booklet (1) PSL-KT Carrying Case (3) PSL-5RED-LS Long Shackle Padlocks w/Red Labels (3) PSL-5RED Standard Shackle Padlocks w/Red Labels (1) PSL-1A Lockout Hasp - 1.0" (25 mm) Jaw Diameter (1) PSL-MLD Multiple Lockout Device (3) PSL-WS Wall Switch Lockouts (3) PSL-CB Circuit Breaker Lockouts (3) PSL-P Plug Lockouts (15 Tags) PVT-98 "EQUIPMENT LOCKED OUT BY..." Safety Tags	1

## MRO Lockout Kit



For Maintenance Departments who must lockout a variety of electrical and mechanical energy sources for departmental work

Part Number	Contents	Std. Pkg.*
PSL-KT-MROA	(1) Screwdriver (1) Lockout Regulations Booklet (1) PSL-BX Carrying Case (3) PSL-5RED-LS Long Shackle Padlocks w/Red Labels (1) PSL-MLD Multiple Lockout Device (2) PSL-WS Wall Switch Lockouts (2) PSL-CB Circuit Breaker Lockouts (2) PSL-P Plug Lockouts (1) PSL-V4RED Gate Valve Lockout - 5.0" (127 mm) (1) PSL-V2RED Gate Valve Lockout - 2.5" (64 mm) (1) PSL-BV2 Ball Valve Lockout - 3.0" (76 mm) (1) PSL-CL 110 110V Plug Lockout (10 Tags) PVT-44 "DO NOT OPERATE" Maintenance Tags	1

## Lockout Stations



- Convenient way to store departmental or personal lockouts
- Durable rigid base with plastic hanging hooks for locks

Part Number	Description	Size In. (mm)	Std. Pkg.*
PSL-20SWC	Departmental Lockout Station. Components include: 20 PSL-3RED padlocks (keyed differently) 25 PVT-98 safety tags 25 PVT-41 safety tags 6 PSL-1.5 lockout hasps	24.0 x 19.0 (610 x 483)	1
PSL-20S	Station Only		
PSL-10SWC	Ten Lock Station Components include: 10 PSL-3RED padlocks (keyed differently) 15 PVT-98 safety tags 10 PVT-41 safety tags 3 PSL-1.5 lockout hasps	12.0 x 19.0 (305 x 483)	1
PSL-10S	Station Only		
PSL-4SWC	Personal Lockout Station Components include: 4 PSL-3RED padlocks (keyed differently) 15 PVT-98 safety tags 3 PSL-1.5 lockout hasps	12.0 x 9.5 (305 x 241)	1
PSL-4S	Station Only		



## Safety Lockout Padlocks



Each lock keyed differently and supplied with 1 key and 2 padlock labels

NOTE: These locks can be master keyed or keyed alike. These locks can also be custom engraved. See Custom Lock Options on [page 14](#) or contact factory for details.

- Rugged, lightweight Xenoy<sup>†</sup> plastic body with non-hardened steel shackle
- Short body: 1.50" x 1.75" (38 x 44 mm)
- Long body: 1.50" x 3.00" (38 x 76 mm), allows for identification from greater distances
- Shackle: 0.25" (6 mm) diameter x 1.50" (38 mm) length

Part Number		Description	Std. Pkg.*
Short Body	Long Body		
PSL-4BLU	PSL-4BLU-LB	Blue Lock	6
PSL-4BLK	PSL-4BLK-LB	Black Lock	6
PSL-4GRN	PSL-4GRN-LB	Green Lock	6
PSL-4ORG	PSL-4ORG-LB	Orange Lock	6
PSL-4PRP	PSL-4PRP-LB	Purple Lock	6
PSL-4RED	PSL-4RED-LB	Red Lock	6
PSL-4TEL	PSL-4TEL-LB	Teal Lock	6
PSL-4YEL	PSL-4YEL-LB	Yellow Lock	6

<sup>†</sup>Xenoy is a registered trademark of General Electric

## High Security Padlocks with Color Coded Lock Body



Each lock keyed differently and supplied with 2 keys

NOTE: These locks can be master keyed or keyed alike. These locks can also be custom engraved. See Custom Lock Options on [page 14](#) or contact factory for details.

- Anodized aluminum padlock with hardened steel shackles and cover-plates
- Special shaped pins to counter picking
- 30% lighter than laminated steel with better corrosion resistance
- 0.25" (6 mm) diameter shackle

Part Number		Description	Std. Pkg.*
1" (25 mm) Shackle	3" (76 mm) Shackle		
PSL-11BLU	PSL-11BLU-LS	Blue Lock	6
PSL-11BLK	PSL-11BLK-LS	Black Lock	6
PSL-11BRN	PSL-11BRN-LS	Brown Lock	6
PSL-11GLD	PSL-11GLD-LS	Gold Lock	6
PSL-11GRN	PSL-11GRN-LS	Green Lock	6
PSL-11ORNG	PSL-11ORNG-LS	Orange Lock	6
PSL-11PRPL	PSL-11PRPL-LS	Purple Lock	6
PSL-11RED	PSL-11RED-LS	Red Lock	6

## Laminated Steel Padlocks with Color Coded Bumper



Each lock keyed differently and supplied with 2 keys

NOTE: These locks can be master keyed or keyed alike. See Custom Lock Options on [page 14](#) or contact factory for details. These locks not suitable for custom engraving.

- Laminated steel, pin tumbler lock
- Double-locking, case-hardened steel shackle
- Bumper color identifies the department or an individual depending on the operation size
- 0.28" (7 mm) diameter shackle

Part Number		Description	Std. Pkg.*
3/4" (19 mm) Shackle	2" (51 mm) Shackle		
PSL-3BLUE	PSL-3BLUE-LS	Lock with Blue Bumper	6
PSL-3BLACK	PSL-3BLACK-LS	Lock with Black Bumper	6
PSL-3GREEN	PSL-3GREEN-LS	Lock with Green Bumper	6
PSL-3RED	PSL-3RED-LS	Lock with Red Bumper	6
PSL-3WHITE	PSL-3WHITE-LS	Lock with White Bumper	6
PSL-3YELLOW	PSL-3YELLOW-LS	Lock with Yellow Bumper	6

## Keyed Alike Laminated Steel Padlocks

- Ready to ship sets of PSL-3 series locks keyed alike. To order keyed alike locks for other styles or master keyed locks, see the Custom Lock Options at the bottom of this page.

Part Number						Locks Per Set	Std. Pkg.*
Blue Bumper	Black Bumper	Green Bumper	Red Bumper	White Bumper	Yellow Bumper		
PSL-3BLU-KA2	PSL-3BLK-KA2	PSL-3GRN-KA2	PSL-3RED-KA2	PSL-3WHT-KA2	PSL-3YEL-KA2	2	1
PSL-3BLU-KA3	PSL-3BLK-KA3	PSL-3GRN-KA3	PSL-3RED-KA3	PSL-3WHT-KA3	PSL-3YEL-KA3	3	1
PSL-3BLU-KA4	PSL-3BLK-KA4	PSL-3GRN-KA4	PSL-3RED-KA4	PSL-3WHT-KA4	PSL-3YEL-KA4	4	1
PSL-3BLU-KA5	PSL-3BLK-KA5	PSL-3GRN-KA5	PSL-3RED-KA5	PSL-3WHT-KA5	PSL-3YEL-KA5	5	1
PSL-3BLU-KA6	PSL-3BLK-KA6	PSL-3GRN-KA6	PSL-3RED-KA6	PSL-3WHT-KA6	PSL-3YEL-KA6	6	1
PSL-3BLU-KA7	PSL-3BLK-KA7	PSL-3GRN-KA7	PSL-3RED-KA7	PSL-3WHT-KA7	PSL-3YEL-KA7	7	1
PSL-3BLU-KA8	PSL-3BLK-KA8	PSL-3GRN-KA8	PSL-3RED-KA8	PSL-3WHT-KA8	PSL-3YEL-KA8	8	1
PSL-3BLU-KA9	PSL-3BLK-KA9	PSL-3GRN-KA9	PSL-3RED-KA9	PSL-3WHT-KA9	PSL-3YEL-KA9	9	1
PSL-3BLU-KA10	PSL-3BLK-KA10	PSL-3GRN-KA10	PSL-3RED-KA10	PSL-3WHT-KA10	PSL-3YEL-KA10	10	1
PSL-3BLU-KA11	PSL-3BLK-KA11	PSL-3GRN-KA11	PSL-3RED-KA11	PSL-3WHT-KA11	PSL-3YEL-KA11	11	1
PSL-3BLU-KA12	PSL-3BLK-KA12	PSL-3GRN-KA12	PSL-3RED-KA12	PSL-3WHT-KA12	PSL-3YEL-KA12	12	1

\*Order number of sets required in multiples of Std. Pkg.

## Value Line Padlocks with Color Coded Labels



- Economical padlock has laminated steel body with case hardened, corrosion resistant steel shackle and double steel ball locking system
- All locks have black bumpers and are supplied with color coded self-laminating padlock labels. Labels are designed with blank write-on area for name and department designation and can be marked with pencil or Panduit Marking Pens found on [page 21](#). Labels sold separately, found on [page 16](#).
- 0.25" (6 mm) shackle diameter

Each lock keyed differently and supplied with 2 keys and colored padlock label

NOTE: These locks not suitable for custom engraving and cannot be master keyed or keyed alike.

Part Number		Description	Std. Pkg.*
3/4" (19 mm) Shackle	2" (51 mm) Shackle		
PSL-5BLU	—	Lock with Blue Padlock Label	6
PSL-5BLK	—	Lock with Black Padlock Label	6
PSL-5GRN	—	Lock with Green Padlock Label	6
PSL-5RED	PSL-5RED-LS	Lock with Red Padlock Label	6
PSL-5WHT	—	Lock with White Padlock Label	6
PSL-5YEL	—	Lock with Yellow Padlock Label	6

\*Order number required in multiples of Std. Pkg.

## Custom Lock Options


Padlocks are available with the following common lock options:

- Master keying
- Keyed-alike locks
- Variety of lock sizes and shackle lengths
- Available in brass for harsh environments
- Engraving available on PSL-4 Safety Lockout and PSL-11 High Security Padlocks

See Generic Lock Order Form on [page 30](#). Contact your Local Distributor for details.


**Note: Excludes PSL-5 Value Line Padlocks**

### INDIVIDUALLY KEYED

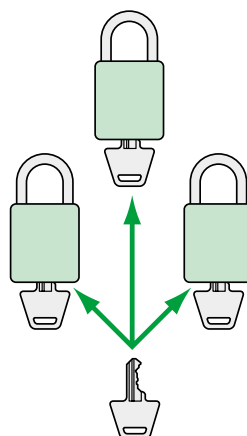


MASTER KEY

### KEYED-ALIKE SYSTEMS



## Lockout Hasps

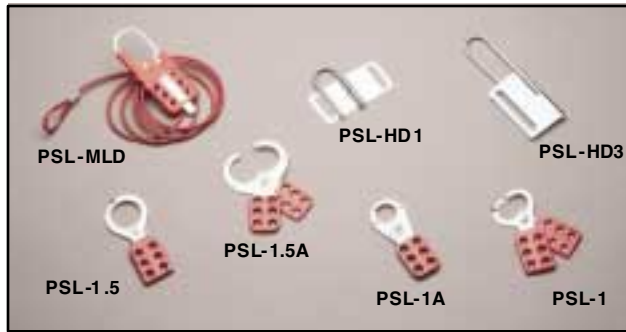

More than one worker can lockout the same energy source for added safety. Heavy duty hasps have tamper-proof design to eliminate vandalism.

Part Number	Description	Max. No. Locks	Std. Pkg.*
PSL-MLD	Multiple Lockout Device; includes lockout hasp and cable	6	1
PSL-MLDH-X	PSL-MLD Lockout Hasps without cable	6	10
PSL-1	Hasp with 1.0" (25 mm) Diameter Jaw and Overlapping Tabs	6	12
PSL-1.5	Hasp with 1.5" (38 mm) Diameter Jaw and Overlapping Tabs	6	12
PSL-1A	Hasp with 1.0" (25 mm) Diameter Jaw	6	12
PSL-1.5A	Hasp with 1.5" (38 mm) Diameter Jaw	6	12
PSL-HD1	Heavy Duty Hasp with 1.0" x 1.0" (25 x 25 mm) Clearance	5	12
PSL-HD3	Heavy Duty Hasp with 1.0" x 3.0" (25 x 76 mm) Clearance	7	12

## Metal I.D. Tags and Collars



PSL-TG1



PSL-SC



MTB1D-Q



MT172W38-C

Part Number	Description	Std. Pkg.*
PSL-TG1	Brass identification tag	12
PSL-SC	Shackle Collar for attaching tags to padlocks	12
MTB1D-Q	Brass identification tag 1.00" (25 mm) diameter	25
MT172W38-C	Stainless steel tag 1.72" x 0.38" (44 x 9 mm)	100

Fixturing for all brass and stainless steel tags is available for use with the Manual Indenter Marking Press. Consult factory.

## Padlock Eyes



- These padlock eyes can help bring you into compliance with OSHA standards, which require that equipment be modified to accept locks and lockout devices
- Surface mounted eyes are made of 0.13" (3 mm) hard wrought steel
- Tamper resistant inside mounting eyes - 2.50" (64mm) wide, accept shackle diameters up to 0.63" (16 mm)

Part Number	Description	Std. Pkg.*
PSL-PE1	Padlock eyes, angled (Metal mounting screws included)	1
PSL-PE2	Padlock eyes, straight (Wood mounting screws included)	1

## Chain Attachment



- Optional 9.0" (229 mm) chain for permanently attaching lockouts at pre-designed locations.

Part Number	Description	Std. Pkg.*
PSL-PC	Heavy duty zinc plated steel chain with chain holder attached	1

# PANDUIT® Padlock Accessories and Lockout/Tagout Safety Tags

## Group Lock Box



- Used when there are multiple employees and energy sources involved in a lockout procedure. Once all energy sources have been locked out, all keys are placed in the lock box. The leader places a lock on lock box until job is finished and all group members are cleared from work area.

Part Number	Description	Dimensions In. (mm)	Std. Pkg.*
PSL-GLB	Lock box for group lockouts	10.00 x 6.00 x 4.00 (254 x 152 x 102)	1

\*Order number required in multiples of Std. Pkg.

## Self-Laminating Padlock Labels



- Used to identify employees' locks. Employees sign the label, attach it to the padlock, and overwrap with the clear vinyl to protect the legend.
- Available in six colors for departmental coding
- One piece design is easy to use

Part Number	Description	Size In. (mm)	Std. Pkg.*
PSL-PL1BLU	Blue Padlock Label	10.00 x 0.75 (254 x 19)	25
PSL-PL1BLK	Black Padlock Label	10.00 x 0.75 (254 x 19)	25
PSL-PL1GRN	Green Padlock Label	10.00 x 0.75 (254 x 19)	25
PSL-PL1RED	Red Padlock Label	10.00 x 0.75 (254 x 19)	25
PSL-PL1WHT	White Padlock Label	10.00 x 0.75 (254 x 19)	25
PSL-PL1YEL	Yellow Padlock Label	10.00 x 0.75 (254 x 19)	25

\*Order number required in multiples of Std. Pkg.

## Write-on Safety Tags



All tags have a write-on surface that accepts pen, pencil or marker pens. Can be permanently marked with Panduit Marker Pens shown on [page 21](#).

Available in 2 styles:

### PVT Lockout Tags

- Meet OSHA Standard 1910.147 requirements for tagout applications
- Semi-rigid plastic tags with a 0.38" (9 mm) brass grommet for greater strength and increased durability
- Tags can be attached with a lockout device or with a Panduit PLT2S nylon tie (50 lb. loop tensile strength) supplied with each tag
- PVT-\*Q Package consists of 25 tags and 25 PLT2S cable ties
- PVT-\* Package consists of 5 tags and 5 PLT2S cable ties

### PCT Lockout Tags

- Economical card stock tags for indoor or temporary use
- Package consists of 25 tags and 25 PLT1.5I cable ties (do not meet 50 lb. loop tensile strength requirement)



Part Number	Material	Size In. (mm)	Tags Per Pkg.	Std. Pkg.*
PVT-*	GMV5 Semi-Rigid Plastic	3.00 x 5.75 (76 x 146)	5	1 Pkg.
PVT-*Q	GMV5 Semi-Rigid Plastic	3.00 x 5.75 (76 x 146)	25	1 Pkg.
PCT-*Q	Card Stock	3.00 x 5.75 (76 x 146)	25	1 Pkg.

\*Order number of packages required in multiples of Std. Pkg.



## Write-on Safety Tags (cont.)

Front Side of Tags (Back side is indicated by Style A, B or C under part number and shown in box below).



PVT-97  
PVT-97-Q  
PCT-97-Q  
Style B




PVT-40-Q  
PCT-40-Q  
Style A




PVT-227-Q  
PCT-227-Q  
Style A



PVT-146-Q  
PCT-146-Q  
Style A



PVT-147-Q  
PCT-147-Q  
Style A



PVT-148-Q  
PCT-148-Q  
Style A



PVT-149-Q  
PCT-149-Q  
Style A



PVT-150-Q  
PCT-150-Q  
Style A



PVT-41  
PVT-152-Q  
PCT-152-Q  
Style A



PVT-15  
Style C




PVT-42-Q  
PCT-42-Q  
Style A



PVT-43  
Style A



PVT-23  
PVT-23-Q  
PCT-23-Q  
Style C

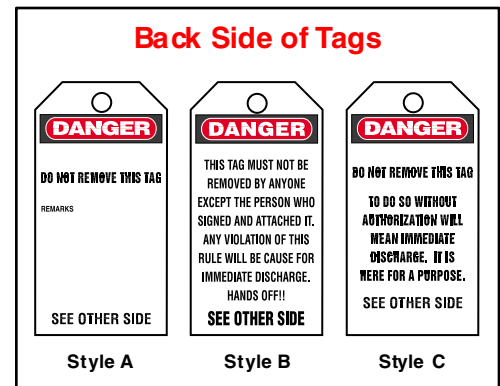

## Write-on Safety Tags (cont.)

Front Side of Tags (Back side is indicated by Style A, B or C under part number and shown in box below).

PVT-153-Q  
PCT-153-Q  
Style A

PVT-99  
PVT-99-Q  
PCT-99-Q  
Style B

PVT-44  
PVT-44-Q  
Style A

PVT-45-Q  
Style A

PVT-155  
PVT-155-Q  
PCT-155-Q  
Style A

PVT-156  
PVT-156-Q  
PCT-156-Q  
Style A

PVT-157-Q  
PCT-157-Q  
Style A

PVT-51-Q  
PCT-51-Q  
Style A

PVT-52-Q  
PCT-52-Q  
Style A

PVT-158-Q  
PCT-158-Q  
Style A

PVT-2-Q  
PCT-2-Q  
Style C

Front

Back

PVT-30  
PVT-30-Q

## Back Side of Tags

Style A

Style B

Style C

## Write-on Safety Tags (cont.)

Front Side of Tags (Back side is indicated by Style A, B or C under part number and shown in box below).




PVT-96  
PVT-96-Q  
Style B



Front


PVT-160-Q  
PCT-160-Q



Back



PVT-57-Q  
PCT-57-Q  
Style A



PVT-27-Q  
PCT-27-Q  
Style C



PVT-59-Q  
PCT-59-Q  
Style A




PVT-60-Q  
PCT-60-Q  
Style A



PVT-26-Q  
PCT-26-Q  
Style C



PVT-9-Q  
PCT-9-Q  
Style C



PVT-62-Q  
PCT-62-Q  
Style A




Front




Back


PVT-98  
PVT-98-Q  
PCT-98-Q



PVT-238-Q  
PCT-238-Q  
Style A

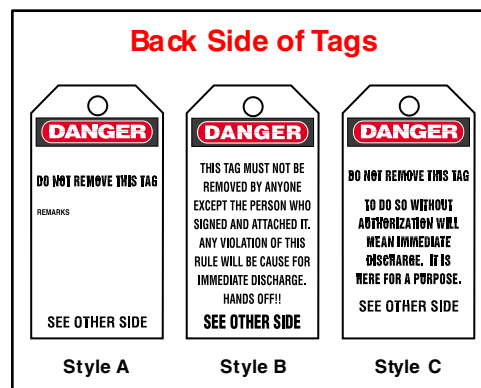

## Back Side of Tags



Style A




Style B



Style C

# PANDUIT® Lockout/Tagout Safety Tags

## Bilingual and Spanish Write-on Safety Tags

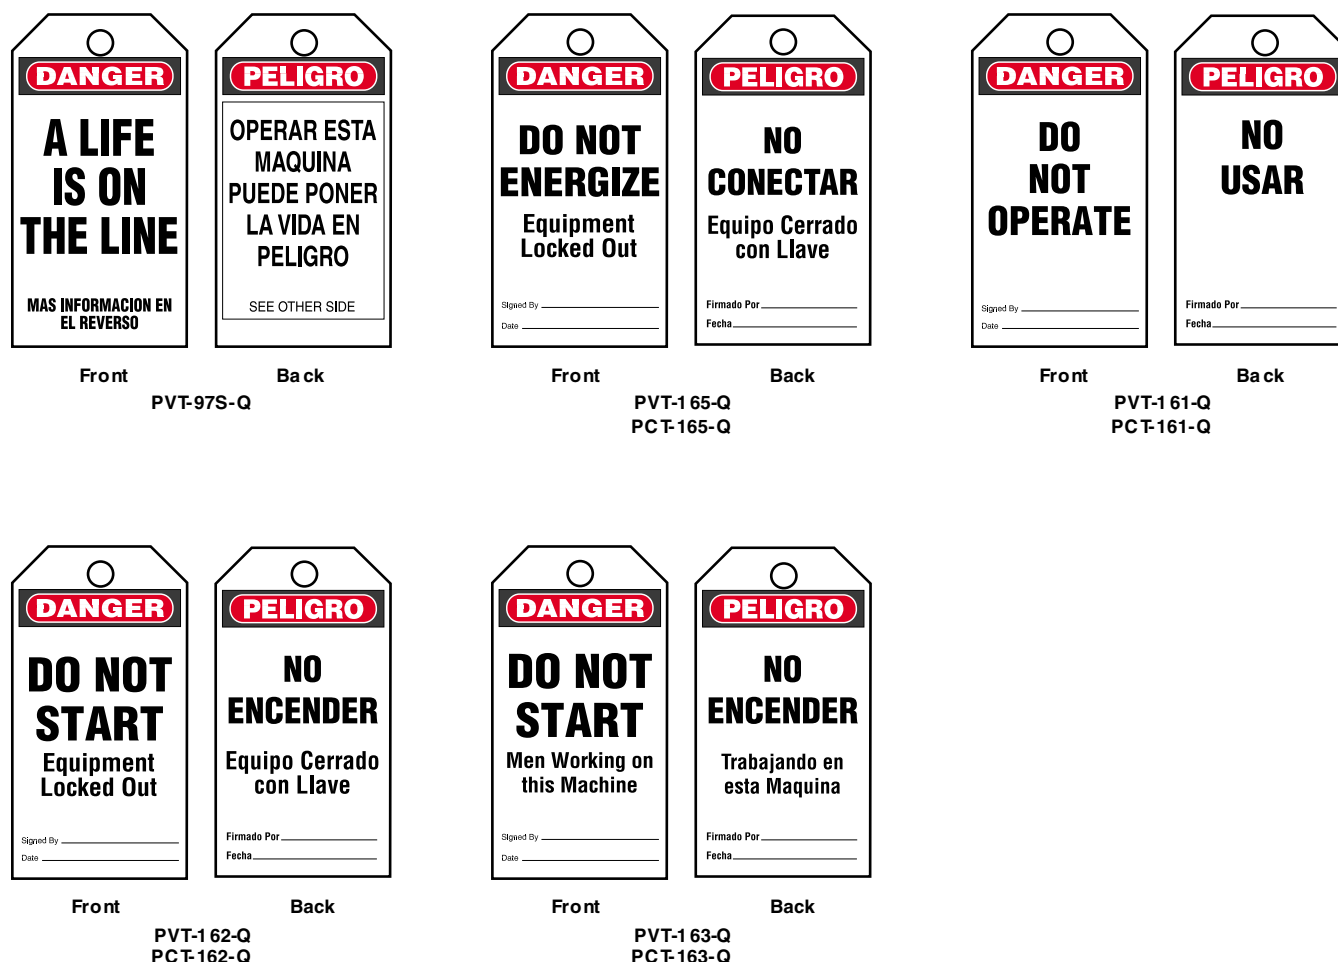


## Self Laminating Photo Tags

- GMV4 Semi-rigid plastic with polyester laminate to protect photo and other written data
- Package consists of 5 tags and 5 PLT2S (50lb. loop tensile strength) nylon cable ties
- Tags have write-on surface and are 3.00" x 5.75" (76 x 146 mm)
- Available in 8 languages

Part Number	Language	Std. Pkg.*
PST-3	English	1 Pkg.
PST-10	English	
PST-10-NL	Dutch	
PST-10-F	French	
PST-10-D	German	
PST-10-I	Italian	
PST-10-N	Norwegian	
PST-10-P	Portuguese	
PST-10-E	Spanish	

\*Order number of packages required in multiples of Std. Pkg.

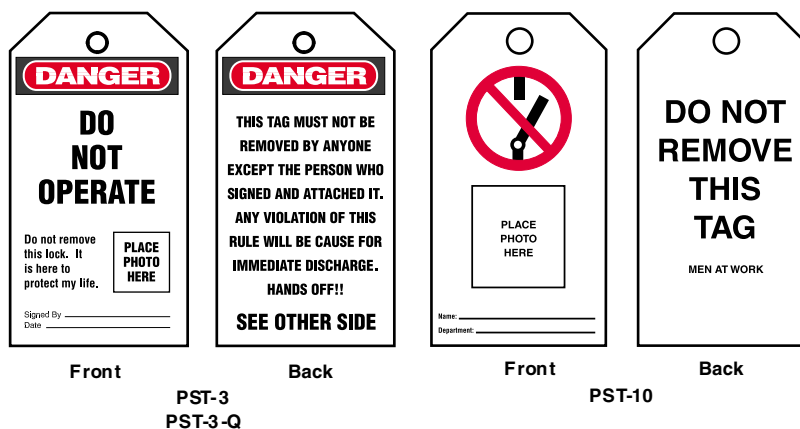




## ISO Symbol Safety Tags



Part Number	Language	Std. Pkg.*
PVT-***	English	1 Pkg.
PVT-***-NL	Dutch	
PVT-***-F	French	
PVT-***-D	German	
PVT-***-I	Italian	
PVT-***-N	Norwegian	
PVT-***-P	Portuguese	
PVT-***-E	Spanish	

\*Order number of packages required in multiples of Std. Pkg.

- The International Organization for Standardization (ISO) has established a system to communicate safety information without the use of words
- Package consists of 5 tags and 5 PLT2S (50lb. loop tensile strength) nylon cable ties
- GMV5 Semi-rigid plastic tags have write-on surface and are 3.00" x 5.75" (76 x 146 mm)
- Available in 8 languages

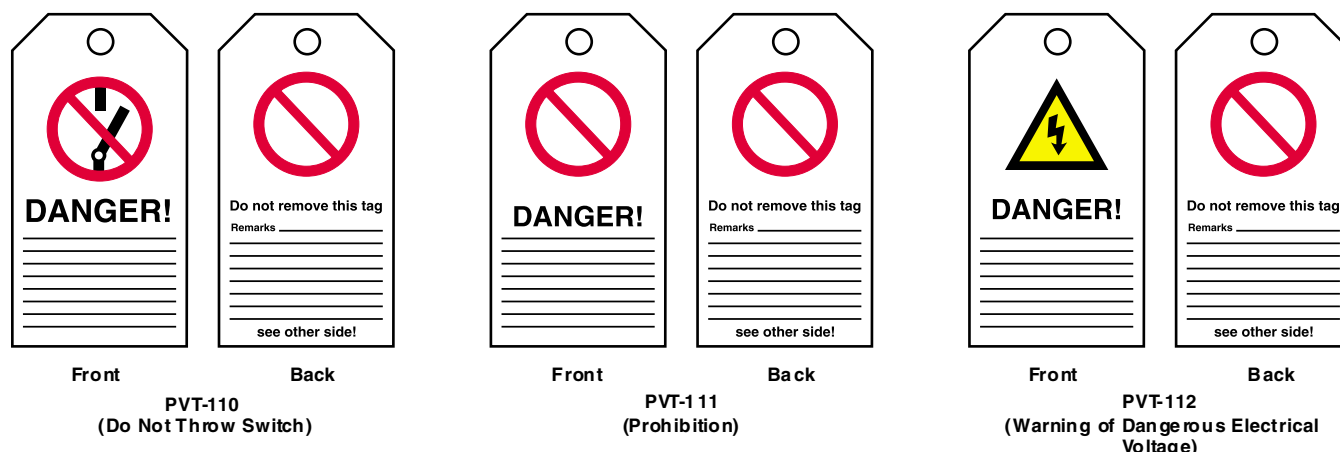

## Replacement Nylon Ties

In addition to the PLT1.5I and PLT2S nylon ties supplied with our lockout tags, Panduit offers other ties in different sizes, colors and materials which can be used with tags. Contact factory for details.

Part Number	Material	Approx. Length In. (mm)	Min. Loop Tensile Strength Lbs. (N)	Std. Pkg.*
PLT1.5I-C	Natural Nylon 6.6 (Indoor)	5.6 (142)	40 (178)	100
PLT2S-C†		7.4 (188)	50 (222)	100
PLT1.5I-C0	Weather Resistant Nylon 6.6	5.6 (142)	40 (178)	100
PLT2S-C0†		7.4 (188)	50 (222)	100

\*Order number of ties required in multiples of Std. Pkg.

†PLT2S ties meet OSHA's 50lb. tensile strength tag attachment requirement

## Marking Pens Used on Safety Tags

Permanent, fast drying ink. Fine tips.



Part Number	Color	Description	Std. Pkg.*
PFX-0	Black	Color of cap and end is color of ink.	12
PFX-2	Red		12

\*Order number of pens required in multiples of Std. Pkg.

## Standout (3D) Lockout Sign



- Rigid acrylic standout sign will identify the location of locks, lockout devices and tags from any vantage point on the plant floor
- Stands out 4.00" (102 mm) from the wall
- Pre-drilled holes as well as self-adhesive mounting pads and mounting screws and washers are provided for quick and easy installation

Part Number	Description	Size In. (mm)	Std. Pkg.*
PAS-LOTO	Standout (3D) Lockout Sign	6.00 x 8.75 (152 x 222)	1

\*Order number of signs required in multiples of Std. Pkg.

## Safety Signs



Panduit offers signs in three materials:

### GMV1 Indoor Adhesive Vinyl (Type PVS)

- Economical, general purpose signs for use in most environments
- Very good adhesive properties when applied to a clean surface

### GMM Indoor/Outdoor Sub-Surface Printed Adhesive Polyester (Type PPS)

- High quality signs for use indoors and outdoors
- Excellent resistance to UV light, chemical atmosphere, and abrasion
- Excellent life and adhesion properties
- Printed graphics are protected by clear polyester laminate

### GMPE Indoor/Outdoor Rigid Polyethylene (Type PRS)

- Rugged signs for indoors and outdoors
- Abrasion resistant
- Used where adhesives will not work

Part Number Prefix	Material	Sign Size In. (mm)	Signs Per Card	Std. Pkg.*
PVS0204	Indoor Adhesive Vinyl	2.25 x 4.50 (57 x 114)	2	5 Cards
PVS0305		3.50 x 5.00 (89 x 127)	2	5 Cards
PVS0503		5.00 x 3.50 (127 x 89)	—	5 Signs
PVS0505		5.00 x 5.00 (127 x 127)	—	5 Signs
PVS0507		5.00 x 7.00 (127 x 178)	—	5 Signs
PVS0705		7.00 x 5.00 (178 x 127)	—	5 Signs
PVS0710		7.00 x 10.00 (178 x 254)	—	1 Sign
PVS1007		10.00 x 7.00 (254 x 178)	—	1 Sign
PPS0202	Indoor / Outdoor Adhesive Polyester	2.25 x 2.25 (57 x 57)	4	5 Cards
PPS0305		3.50 x 5.00 (89 x 127)	2	5 Cards
PPS0505		5.00 x 5.00 (127 x 127)	—	5 Signs
PPS0710		7.00 x 10.00 (178 x 254)	—	1 Sign
PRS0710	Indoor / Outdoor Rigid Polyethylene	7.00 x 10.00 (178 x 254)	—	1 Sign
PRS1007		10.00 x 7.00 (254 x 178)	—	1 Sign
PRS1014		10.00 x 14.00 (254 x 356)	—	1 Sign
PRS2014		20.00 x 14.00 (508 x 356)	—	1 Sign

\*Order number required in multiples of Std. Pkg.

## Lockout / Tagout Safety Signs

See [page 22](#) for information on part number sizes and materials.



PVS0204C531




PVS0710C180  
PRS0710C180



PRS0710D83



PVS0204C523



PVS0204C176



PVS0204C175  
PVS0507C175



PVS0204C171  
PVS0710C171




PVS0204C177



PVS0204W172  
PVS0710W172




PVS0204C179



PVS0204C529



PVS0204C501




PVS0204C526




PVS0710C173  
PRS0710C173




PVS0204C524



PVS0204C525

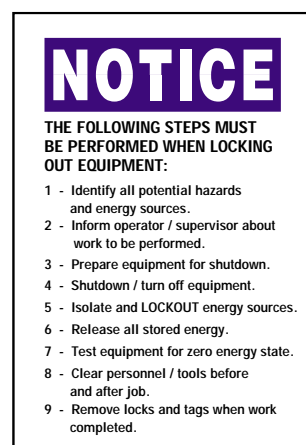

PVS0503N458  
PVS0705N458  
PVS1007N458  
PRS1007N458

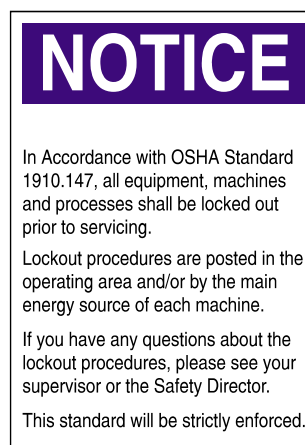

PRS2014N182

## Machine and Operational Safety Signs

See [page 22](#) for information on part number sizes and materials.



PPS071 0D24



PPS0710C119  
PRS0710C119



PPS02 02B4 94



PRS101 4N19 1



PVS0204 C533




PRS1014 D84




PPS02 02B5 21



PRS101 4C122



PVS0710 C519




PVS0710C 518



PPS02 02B4 93



PVS0204 D100




PVS0204 C522




PVS0204C 178



PVS07 10D1 01  
PRS0 710D 101  
PRS1 014D 101



PVS0305 C174  
PVS0505 C174  
PPS0305 C174  
PPS0505 C174



PPS0202B 520



PVS07 10D1 02



PVS0705 C181



### Circuit Breaker Directory Sign

- Eliminate the guesswork when identifying power sources — a must for lockout/tagout compliance
- Adhesive paper sign designed to provide clear identification of circuit breaker connections, list up to 40 circuits



Part Number	Description	Size In. (mm)	Std. Pkg.*
PES-S1	Circuit Breaker Directory Sign	13.00 x 5.50 (330 x 140)	1






## SAFETY EASE™ Safety Sign Software and Accessories



**Create lockout, operational and electrical signs and tags in minutes!**


- Create cost-effective English and Spanish signs and tags on your ink jet or laser printer
- Select from over 2,000 pre-defined safety and general facility legends or create your own custom legend
- Pictographs and spell check included
- System Requirements: WINDOWS® 3.1 or higher, 386 processor or higher, 4 Mb RAM for WINDOWS 3.1 and 3.11, 8 Mb RAM for WINDOWS 95, 3 Mb hard drive space for CD-ROM Version, 5 Mb RAM hard drive space for diskette version

Part Number	Description	Format	Std. Pkg.*
SEZ-SN	<b>SAFETY EASE</b> Safety Sign Software	(2) 3.5" Diskettes	1
SEZ-SN-CD		(1) Compact Disk	1

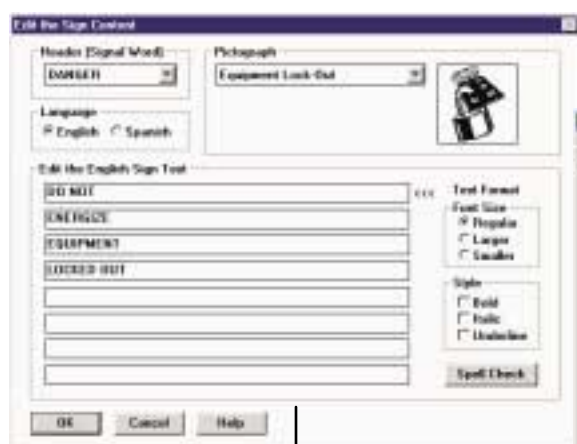

Pop Up Edit Screen allows the user to quickly edit text, change headers and add pictographs

Convenient Category and Message Pull Down Menus allow user to choose from over 2,000 legends

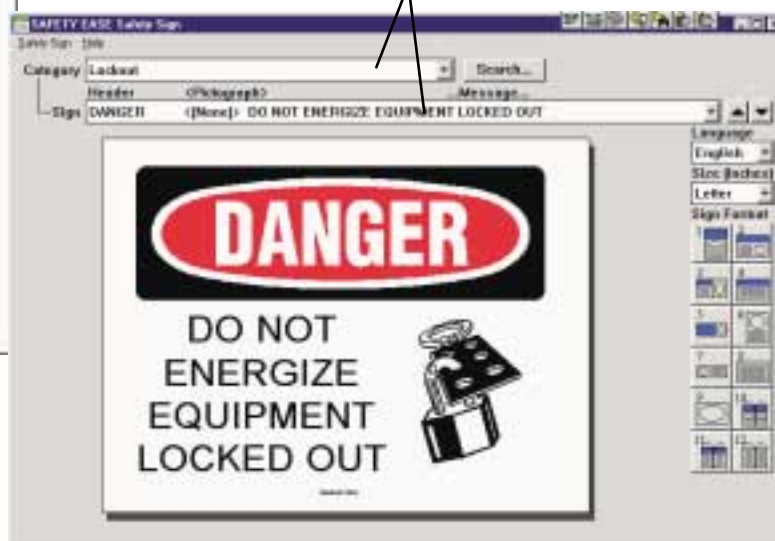

## Adhesive Laser Printable Signs



- Indoor pressure sensitive GMPD Polyolefin signs with square corners on stay flat liner

Part Number	Header	Color (Legend/Background)	Size In. (mm)	Signs/Pkg.	Std. Pkg.*
SEZ-1DLL	DANGER	Red and Black/White	8.5 x 11.0 (216 x 279)	25	1 Pkg.
SEZ-1CLL	CAUTION	Black/Yellow			
SEZ-1NLL	NOTICE	Blue/White			
SEZ-1WLL	WARNING	Black/Orange			
SEZ-1YLL	No Header	Yellow			
PLL-25-PO-SH	No Header	White			

\*WINDOWS is a registered trademark of Microsoft

## SAFETY EASE™ Products (cont.)



### Self-Laminating Adhesive Sign Carriers

- Convert paper to adhesive indoor signs
- For clean and dry surfaces

Part Number	Carrier Size In. (mm)	For Maximum Label Size In. (mm)	Carriers Per Pkg.	Std. Pkg.*
SEZ-SNC4	7.0 x 6.0 (178 x 152)	6.0 x 5.0 (152 x 127)	5	1 Pkg.
SEZ-SNC2	10.5 x 7.0 (267 x 178)	9.5 x 6.0 (241 x 152)	5	
SEZ-SNC3	12.0 x 6.0 (305 x 152)	11.0 x 5.0 (279 x 127)	5	
SEZ-SNC1	12.0 x 9.5 (305 x 241)	11.0 x 8.5 (279 x 216)	5	



Print paper marker using a laser or ink jet printer and cut out with scissors.



Place marker between the two pieces of self-adhesive laminate liner.



Remove top adhesive liner by peeling and press firmly onto top of marker.



Remove liner on back of carrier and adhere to clean, dry surface.

### Self-Laminating Rigid Sign Carriers

- Convert paper to rigid indoor signs
- Cut out paper sign and insert into the self-laminating carrier

Part Number	Carrier Size In. (mm)	For Maximum Label Size In. (mm)	Carriers Per Pkg.	Std. Pkg.*
SEZ-RSC1	7.0 x 6.0 (178 x 152)	6.0 x 5.0 (152 x 127)	5	1 Pkg.
SEZ-RSC2	10.5 x 7.0 (267 x 178)	9.5 x 6.0 (241 x 152)	5	
SEZ-RSC4	12.0 x 6.0 (305 x 152)	11.0 x 5.0 (279 x 127)	5	
SEZ-RSC3	12.0 x 9.5 (305 x 241)	11.0 x 8.5 (279 x 216)	5	

### Indoor Rigid Vinyl Safety Tag Carriers



Print paper tag using a laser or ink-jet printer. Use scissors to cut out tag.



Place tag between self-adhesive laminate liner and rigid vinyl backing. Fasten tag with Panduit Cable Tie.

- Create your own rigid indoor tags with protected legends in minutes! Using the PST Tag carrier allows tags to be resistant to mild chemicals and acids. Sturdy brass grommet provides extra durability
- Panduit PLT2S (7.4") nylon ties included for quick and easy installation
- Meet OSHA Standard 1910.147 for lockout tag 50 lb. pull force requirement

Part Number	Description	Lamination	Carriers and Ties/ Pkg.	Std. Pkg.*
PST-4	Tag Carriers with overlamine	Front Only	25	1 Pkg.
PST-5		Front and Back	25	

### Economical Card Stock Tags for Ink Jet Printers



Print sheet of tag stock using an ink-jet printer. Tear tags apart on perforation.

- Economical solution for temporary, indoor tags

Part Number	Description	Color	Sheets/ Pkg.	Std. Pkg.*
SEZ-TAGWH	Perforated card stock, four blank tags per sheet	White	25	1 Pkg.
SEZ-TAGOR		Orange		
SEZ-TAGY		Yellow		

## Label Dispensers



- Self-adhesive labels with write-on surface in handy dispenser

Part Number	Material	Size In. (mm)	Labels per Dispenser	Std. Pkg.*
PLD-*	GMM Subsurface Printed Polyester	1.50 x 1.00 (38 x 25)	200	1 disp.

\*Order number of dispensers required in multiples of Std. Pkg.


Panduit offers other standard label dispensers to meet many labeling requirements. Contact factory for details.



PLD-56  
ISO 3864 Warning -  
Risk of Electric Shock




PLD-36 Caution 120V  
PLD-37 Caution 220V  
PLD-38 Caution 240V



PLD-12



PLD-75  
NEC 800




PLD-74



PLD-43



PLD-67  
NEC 110-31



PLD-68



PLD-72




PLD-81  
NEC 230.70(b)


## Warning Labels



WL25  
Reusable adhesive allows label to be applied, unsealed and resealed.



WL32  
ISO 3864



WL33  
ISO 3864

Part Number	Material	Legend	Color (Legend/Background)	Label Size Width x Length In. (mm)	Labels per Pkg.	Std. Pkg. Qty.*
WL25	GMV Polyester	Warning...Lift & Lock	Black/Yellow	3.50 x 1.50 (89 x 38)	50	1 Pkg.
WL32	GMV1OL Vinyl	Warning Risk Of Electrical Shock Sym.	Black/Yellow	1.50 (38) Triangle	50	
WL33	GMV1OL Vinyl	Warning Risk Of Electrical Shock Sym.	Black/Yellow	4.50 (114) Triangle	50	



\*Order number of packages required in multiples of Std. Pkg. Qty.

## ISO Labels - Warning Signs

- The International Organization for Standardization (ISO) has established a system to communicate safety information without the use of words. This is accepted in most countries worldwide. Colors and shapes recognizable worldwide are prescribed.



ISO symbology for "Risk of Danger" is a triangle (using black and yellow as its primary colors) to denote "WARNING." The symbols below are those generally accepted as usable without supplementary signs to explain the essence of the message.

- Ref. ISO 3864 (DIN 40008, DIN 4844)

Part Number	Legend	Description	Triangular Length In. (mm)	Markers Per Card	Material	Std. Pkg.*
PESW-A-1 PESW-B-1 PESW-C-1 PESW-D-1 PESW-E-1		Warning - Risk of Electric Shock	0.49 (12.5) 0.98 (25.0) 1.97 (50.0) 3.94 (100.0) 7.87 (200.0)	10 10 10 3 1	GMV10L Laminated Vinyl	10 Cards
PESW-A-9 PESW-B-9 PESW-C-9 PESW-D-9 PESW-E-9		Warning of Hazard	0.49 (12.5) 0.98 (25.0) 1.97 (50.0) 3.94 (100.0) 7.87 (200.0)	10 10 10 3 1		


## ISO Labels — Prohibition Signs

- The circle denotes a prohibition or mandatory action. The following symbols in red, white and black prohibit certain behavior.
- Ref. ISO 3864 (DIN 40008, DIN 4844)

Part Number	Symbol	Description	Marker Diameter In. (mm)	Markers Per Card	Material	Std. Pkg.*
PESV-C-1 PESV-D-1 PESV-E-1		Do not throw switch	1.97 (50) 3.94 (100) 7.87 (200)	5 1 1	GMV10L Laminated Vinyl	10 Cards
PESV-C-2 PESV-D-2 PESV-E-2		Do not touch	1.97 (50) 3.94 (100) 7.87 (200)	5 1 1		

## ISO Labels — Mandatory Labels

- The below symbol denotes a mandatory action without the use of words. The most common mandatory action in the Electrical Industry is to insure the electrical supply is switched off.
- Ref. ISO3864 (DIN 40008)

Part Number	Symbol	Description	Marker Diameter In. (mm)	Markers Per Card	Material	Std. Pkg.*
PESG-A-1 PESG-B-1 PESG-C-1 PESG-D-1		Switch off electrical supply before working on equipment	0.49 (13) 0.98 (25) 1.97 (50) 3.94 (100)	10 10 5 1	GMV10L Laminated Vinyl	10 Cards

*Panduit offers a complete line of ISO Warning, Prohibition and Mandatory Symbol labels. Contact Customer Service or your local Sales Office for more information.*

## Voltage Markers

Available in two styles:



### Adhesive Marker Cards

- Durable GMV1 Indoor Vinyl Material
- Available in 3 sizes



### Snap-On Markers (Non-Adhesive)

- Pre-coiled, sub-surface printed markers for indoor use
- Available in 2 sizes


Style	Type	Conduit O.D. In. (mm)	Marker Size Width x Length In. (mm)	Markers Per Card	Std. Pkg.*
A	Adhesive Marker Cards	3.00 (76) and Over	9.00 x 2.25 (229 x 57)	1	5 Cards
B		1.25 - 3.00 (32 - 76)	4.50 x 1.13 (114 x 29)	4	
C		1.25 (32) and Under	2.25 x 0.50 (57 x 13)	18	
M	Snap-On Markers (Non-Adhesive)	2.25 - 6.00 (57 - 152)	14.00 x 23.00 (356 x 584)	1	1 Marker
R		0.75 - 2.25 (19 x 57)	8.00 x 8.00 (203 x 203)	1	

\*For Styles A, B, and C, order number of cards required in multiples of Std. Pkg.; for Styles M and R, order number of markers required in multiples of Std. Pkg.

Part Number					Legend	Color (Legend/Bkr nd)
Style A	Style B	Style C	Style M	Style R		
PCV-110A	PCV-110B	PCV-110C	—	—	110 Volts	Black/Orange
PCV-120A	PCV-120B	PCV-120C	—	PCV-120R	120 Volts	
PCV-208A	PCV-208B	PCV-208C	—	—	208 Volts	
PCV-240A	PCV-240B	PCV-240C	—	—	240 Volts	
PCV-277/480A	PCV-277/480B	PCV-277/480C	—	—	277/480 Volts	
PCV-480A	PCV-480B	PCV-480C	PCV-480M	PCV-480R	480 Volts	
PCV-600A	PCV-600B	PCV-600C	—	—	600 Volts	
PCV-CNA	PCV-CNB	PCV-CNC	—	—	Circuit #	
PCV-CBA	PCV-CBB	PCV-CBC	—	—	Circuit Breaker	
PCV-1PHA	PCV-1PHB	PCV-1PHC	—	—	Single Phase	
PCV-3PHA	PCV-3PHB	PCV-3PHC	—	—	Three Phase	

## Marker Books

GMV1 Vinyl

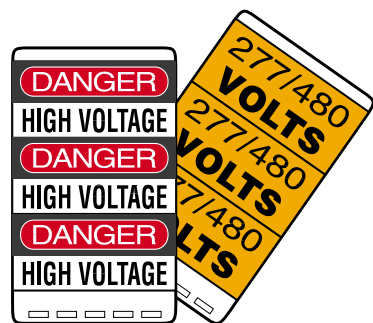

Marker Size:  
1.50" x 3.25" (38 x 82 mm)

Part Number	Legend	Markers Per Page	Markers Per Book	Std. Pkg.*
Voltage Markers				
PCVB-110	110 Volts	3	30	1 Book
PCVB-220	220 Volts			
PCVB-277	277 Volts			
PCVB-277/480	277/480 Volts			
PCVB-440	440 Volts			
PCVB-480	480 Volts			
PCVB-550	550 Volts			
PCVB-4160	4160 Volts			
Safety Signs				
PSSB-13	Danger High Voltage	3	30	1 Book

\*Order number of books required in multiples of Std. Pkg.



# Panduit Corp. Generic Lock Order Form

One Form per Generic Lock Option

**Fax orders to Panduit Corp. - Identification Products Division, Attn. Customer Service (770-889-9264).**

**Generic Locks are Non-Returnable**

Date: \_\_\_\_\_

Panduit Sales Rep: \_\_\_\_\_

From: \_\_\_\_\_

Distributor: \_\_\_\_\_

Telephone #: \_\_\_\_\_

End-User: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Telephone #: \_\_\_\_\_

Distributor Contact: \_\_\_\_\_


Telephone #/Fax #: \_\_\_\_\_

Account #: \_\_\_\_\_


Account #: \_\_\_\_\_

## Generic Padlock Options


### KEYED ALIKE SYSTEM



### INDIVIDUALLY KEYED AND MASTER KEYED

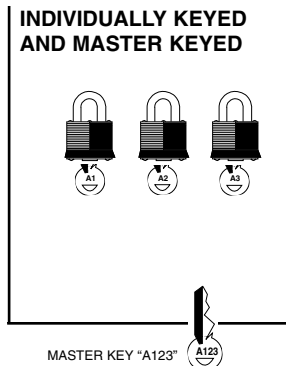

### KEYED ALIKE AND MASTER KEYED

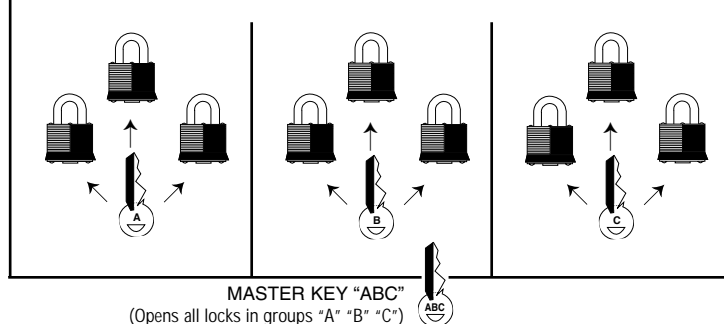

Generic Lock Part Number	Description	Qty Min. 6/Lock Series	Notes (Colors, Key Numbers, Set Description)
--------------------------	-------------	---------------------------	---

GPSL-3KA	Keyed Alike Padlock - 3/4" Shackle		
GPSL-3LSKA	Keyed Alike Padlock - 2" Shackle		
GPSL-3MK	Master Keyed Padlock - 3/4" Shackle		
GPSL-3LSMK	Master Keyed Padlock - 2" Shackle		
GPSL-3MKEY	Master Key for a PSL-3 Master Keyed Padlock		
GPSL-3KAMK	Keyed Alike and Master Keyed Padlock - 3/4" Shackle		
GPSL-3LSKAMK	Keyed Alike and Master Keyed Padlock - 2" Shackle		

GPSL-4KA	Keyed Alike Padlock		
GPSL-4LBKA	Keyed Alike Padlock - Long Body		
GPSL-4MK	Master Keyed Padlock		
GPSL-4LBMK	Master Keyed Padlock - Long Body		
GPSL-4MKEY	Master Key for a PSL-4 Master Keyed Padlock		
GPSL-4KAMK	Keyed Alike and Master Keyed Padlock		
GPSL-4LBKAMK	Keyed Alike and Master Keyed Padlock - Long Body		

GPSL-11KA	Keyed Alike Padlock - 1" Shackle		
GPSL-11LSKA	Keyed Alike Padlock - 3" Shackle		
GPSL-11MK	Master Keyed Padlock - 1" Shackle		
GPSL-11LSMK	Master Keyed Padlock - 3" Shackle		
GPSL-11MKEY	Master Key for a PSL-11 Master Keyed Padlock		
GPSL-11KAMK	Keyed Alike and Master Keyed Padlock - 1" Shackle		
GPSL-11LSKAMK	Keyed Alike and Master Keyed Padlock - 3" Shackle		

**For Pricing and Lead Time Information, Contact Customer Service at 888-506-5400, ext. 1777.**